


RHM10-170M

10 - 170W

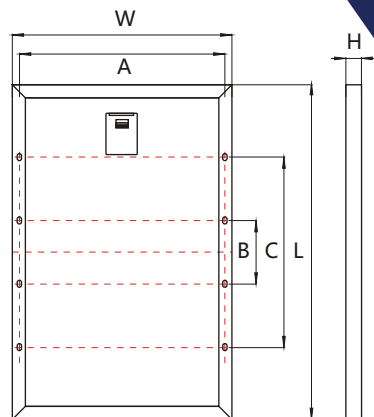

组件规格 Module Dimension

组件特性
KEY FEATURES

+5 Wp
0~+5W正公差
Positive power tolerance to +5W

PID
抗PID工艺
PID resistant


22
组件抗压能力5400帕雪压
和2400帕风压不惧台风和雪压
Heavy snow load 5400 Pa
Wind load 2400 Pa

EL
100% EL全检
100% electroluminescence

IP67
接线盒密封等级: IP67
IP67 junction box for long term endurance

25 year
25年线性功率输出保证
25 years linear power warranty

10 year
10年产品质保
10 years product warranty

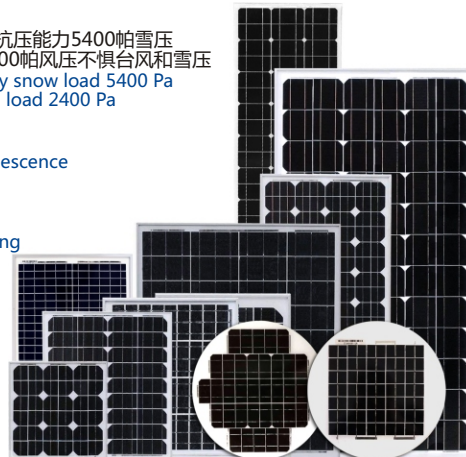

技术参数 MODULE CHARACTERISTICS

图片仅供参考，组件图型以成品为准
The picture is for reference only. Module pattern is based on the finished product.

系列 Module type	规格 Dimension	电性能 Electrical Characteristics				功率 Power	安装孔(mm) Mounting hole		电池 数量 Cell quantity	划片方式 或尺寸 Slicing method or size	重量 (KG) Weight	电缆 Cable
		Voc	Vmp	Isc	Imp		A/B/c	数量-孔径				
RSM-170M	1482*676*35	23.5V	19.1V	9.45A	8.5A	170W			36(4*9)	156*156	12	4mm ² ,90cm
RSM-160M	1482*676*35	22.6V	18.5V	9.29A	8.65A	160W	626/600 /1200	8-Φ9*14	36(4*9)		11.5	
RSM-150M	1482*676*35	22.7V	18.3V	8.68A	8.2A	150W			36(4*9)	156*156	11.1	4mm ² ,90cm
RSM-120M	1195*676*35	22.7V	18.3V	6.95A	6.56A	120W			36(4*9)	124.8*156	9.7	4mm ² ,90cm
RSM-110M	1022*676*35	22.5V	18.4V	6.44A	5.98A	110W	636/620	4-Φ9*14	36(4*9)	2/3	7.3	
RSM-100M	970*676*30	22.5V	18.4V	5.76A	5.43A	100W	646/600	4-Φ7*11	36(4*9)	156*98	6.8	
RSM-90M	880*670*30	22.5V	18.4V	5.33A	4.89A	90W	640/400	4-Φ7*11	36(4*9)	156*88	6.0	
RSM-85M	766*674*30	23.5V	19.1V	4.75A	4.45A	85W			36(4*9)	78*156	7.6	without cable
RSM-80M	770*670*25	22.3V	18.2V	4.7A	4.44A	80W	640/400	4-Φ7*11	36(4*9)	156*78	5.2	
RSM-75M	766*674*30	22.7V	18.3V	4.34A	4.1A	75W			36(4*9)	78*156	6.2	without cable
RSM-70M	850*518*25	22.4V	18.3V	4.15A	3.83A	70W	488/400	4-Φ7*11	36(4*9)	156*62.4	4.6	
RSM-60M	670*530*25	22.4V	18.3V	3.52A	3.28A	60W	500/400	4-Φ7*11	36(4*9)	1/3	3.7	
RSM-50M	634*542*25	22.4V	18.3V	3A	2.73A	50W	512/400	4-Φ7*11	36(4*9)	156*44	3.6	
RSM-40M	604*542*25	22.2V	18.1V	2.48A	2.21A	40W	512/400	4-Φ7*11	36(4*9)	156*44	3.5	
RSM-30M	440*542*25	22.2V	18.1V	1.8A	1.66A	30W	410/320	4-Φ7*11	36(4*9)	1/5	2.8	
RSM-20M	476*358*25	22.1V	18V	1.2A	1.11A	20W	328/230	4-Φ7*11	36(4*9)	1/7	2	
RSM-10M	350*262*17	22.4V	18.2V	0.6A	0.55A	10W	238/130	4-Φ6*8	36(4*9)	1/14	0.9	

标准测试环境(STC)辐照度 1000W/m², 大气质量AM1.5, 组件温度25° Measurements under Standard Test Conditions (STC) Irradiance 1000W/m², AM1.5G Spectrum and Cell Temperature 25°C



江西瑞皇新能源科技有限公司 JIANGXI RUIHUANG NEW ENERGY AND SCIENCE CO.,LTD.

是一家集研发, 生产, 销售为一体的高新技术光伏企业, 专业从事太阳能电池板的研发、制造和应用, 制造工厂总面积5万平方米, 拥有多条全自动太阳能电池板生产线。公司致力于向世界各地的客户提供高质量太阳能产品, 光伏系统和服务。

It is a high-tech PV enterprise dedicated to research & development, production, sales & after sales service, mainly engaged in crystalline silicon solar cells, solar panels, photovoltaic systems, and PV applications. Ruihuangsolar is committed to offer high quality solar components, systems and services to customers around the world.

管理体系和产认证证书

MANAGEMENT SYSTEMS & PRODUCT CERTIFICATES



Management System
ISO9001:2015
www.tuv.com
ID 9105016347



Management System
ISO9001:2015
ISO14001:2015
OHSAS18001:2007



地址: 江西省新余市渝水区五一南路195号
Add: No. 195 wuyinan Road, xinyu city, jiangxi province, China
电话/Tel: +86 0790 6666242
网址/Web: www.ruihuangsolar.com
手机/MP: 0086 15279089080
邮箱/E-mail: terrina.huang@ruihuangsolar.com
微信/WhatsApp: +86 15279089080